

Stainless Steel Two Hole Straps

Features and Benefits

- Manufactured in 316 stainless steel for superior corrosion resistance, exceptional strength, and outstanding performance in harsh environments.
- Hygienic polished surface improves cleanability, resists microbial buildup, and delivers a consistent, professional appearance.
- Permanent fiber laser identification eliminates contamination risks and maintains traceability without surface marring.
- Heavy-gauge stainless steel construction maintains shape and support under mechanical stress.

Applications


- RMC's type 316 stainless steel Two Hole Straps are built for heavy-duty performance, providing secure support and mounting of stainless steel Rigid Conduit to multiple structural members and flat surfaces in corrosive or demanding environments.

Material

- Body: Type 316 Stainless Steel

Certifications

- UL/cUL 2239 Listed
- UL File # E516500
- RoHS compliant
- REACH compliant

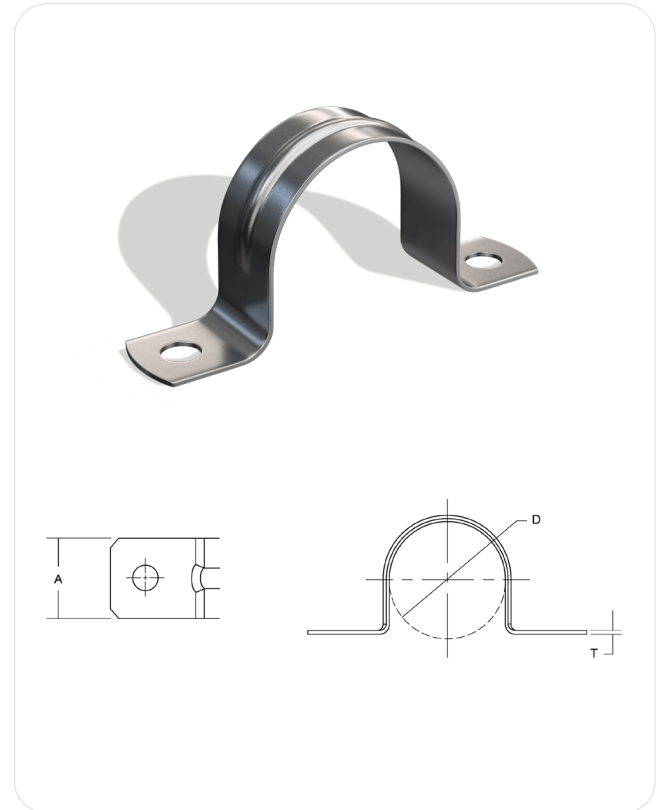

Part Number	Trade Size	A	D	T	Bolt Hole Size	WT/PC (lbs.)
SR62H05	1/2"	0.835"	0.840"	0.071"	0.188"	0.04
SR62H07	3/4"	0.992"	1.050"	0.079"	0.188"	0.05
SR62H10	1"	1.465"	1.314"	0.079"	0.188"	0.07
SR62H12	1-1/4"	1.660"	1.660"	0.079"	0.250"	0.11
SR62H15	1-1/2"	1.886"	1.900"	0.098"	0.250"	0.18
SR62H20	2"	2.303"	2.376"	0.110"	0.250"	0.20
SR62H25	2-1/2"	2.780"	2.876"	0.150"	0.250"	0.28
SR62H30	3"	3.425"	4.000"	0.177"	0.250"	0.41
SR62H40	4"	4.571"	4.500"	0.177"	0.250"	0.70